

Open Voice Intercom



Master station



LEM-1
1-call master



LEM-3
3-call master

Power supply
PS-0602D PS-0602C → P.105

Door station



LE-D
Sub station
→ P.60




LE-DA
Sub station
→ P.60

Room sub station



LE-A
Sub station
→ P.60




LE-AN
Privacy sub
→ P.60

Features


- Open voice communication
- Push-to-talk at master, hands free at remote
- LE sub stations: either door station or room sub station
- Voice volume control

Communication network

LEM-1




LEM-3




LEM-1; Tone or voice. LEM-3; Selective call w/tone or voice. Tone and LED from sub

Unit dimensions


LEM-1, LE-A, LE-AN




LEM-3



LE-D




LE-DA




Wiring

LEM-1



LEM-3

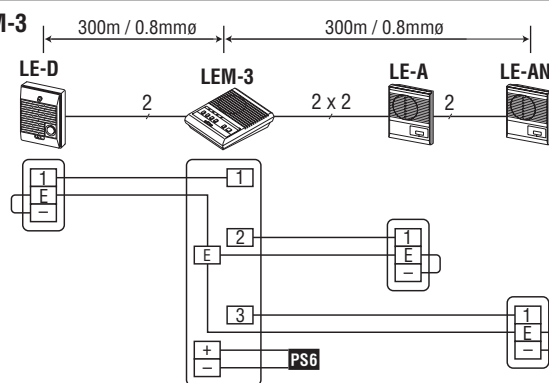

★ Do not remove shorting link on subs. **PS6** : PS-0602D, PS-0602C

Specifications (LEM)

Power source	6V DC, 200mA
Power supply	PS-0602D, PS-0602C
Communication	Sub calls in w/tone and LED, 20 sec. Depress selector button and press or release TALK button. Sub called by tone or voice. Reply hands-free.
Output	350mW output, adjustable
Wiring	2 parallel wires per sub, non-polarized
Wiring distance	LEM to sub 200m(0.65mmø) 300m(0.8mmø)