

**KNOW
WHO IS OUT THERE
BEFORE LETTING THEM IN!**



**A cost effective
CCTV system that
interfaces with
your POLOphone
intercom.**

The POLOphone allows communication with your guest at the gate entrance while the CCTV allows you to view the surrounding area to make sure that no unwanted visitors plan to enter at the same time.

Including the entrance up to 4 cameras can be strategically located at various points around the property to provide surveillance of potentially insecure areas.

Components and features of the system

Up to 4 outdoor colour cameras with infra-red night vision

- 1/3" Sony CCD Video chip
- 3.6mm lens
- 420 TVL resolution
- 0.1 lux (Infra- Red LEDs on)
- Weatherproof
- Includes mounting bracket

Modern looking 7" Colour LCD flat monitor with wall bracket to mount alongside POLOphone handset - can add extra monitor or connect to TV.

Surveillance mode

- Timed switching -system will automatically cycle from one camera to the next - cycle time adjustable from 5 to 30 seconds.
- Sequential switching from POLOphone handset - use auxiliary button on handset to manually cycle from one camera to the next.
- Latch to view one camera only - press and hold auxiliary button for three seconds and system will switch and hold on the camera selected.

Use AV input of house TV to provide additional monitor - timed switching only. Limited to one TV.

Standard POLOphone audio intercom

Full battery back-up of POLOview system



Option to add DVR (Digital Video Recorder)

Wiring

- Co-axial cable (RG59) between each camera and switching module.
 - Co-axial cable (RG59) from switching module to LCD monitor.
 - 2 core for DC power between each camera and switching module (distance < 150m 0.5mm²).
 - 2 core DC power between switching module and LCD monitor.
- Note: We recommend the use of POWERAX cable being a single cable that contains both the RG59 for the video signal and 2 cores for the 12V DC supply - maximum distance 150m.
- 3 core between POLOphone handset and switching module for auxiliary control of system - refer to POLOphone installation manual for details on cabling required for POLOphone system.

Distances

- Maximum 150m between each camera and monitor inside house.
- Maximum 150m between intercom entry panel and handset.

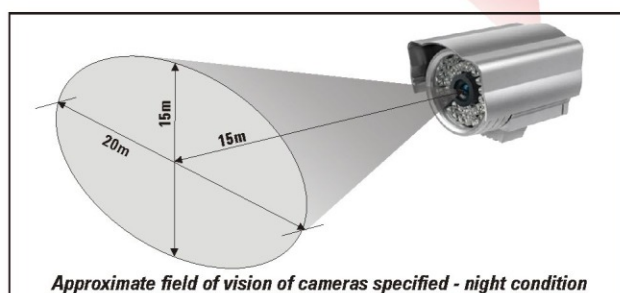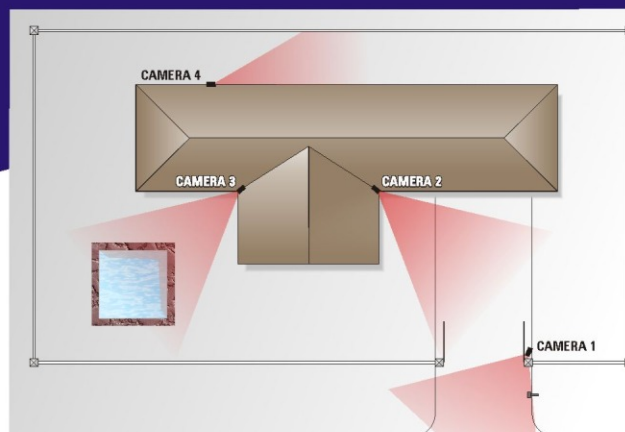

Call 0860-CENTURION for an authorised installer near you
0860-236-887 (Sharecall number only applicable from within South Africa)